


Number	Name	Description
3	Removable terminal block	The inputs are connected to sensors. The outputs are connected to loads to be driven.
4	Arrangement of the input/output terminals	Arrangement of the terminals
5	Terminal block clip	Secures the terminal block
6	DIN rail clip	Secures the DIN rail
7	External module port	Connects the modules
8	Label	Nameplate

- AS16AM10N-A/AS16AN01P-A/AS16AN01R-A/AS16AN01T-A/AS16AP11P-A/AS16AP11R-A/AS16AP11T-A

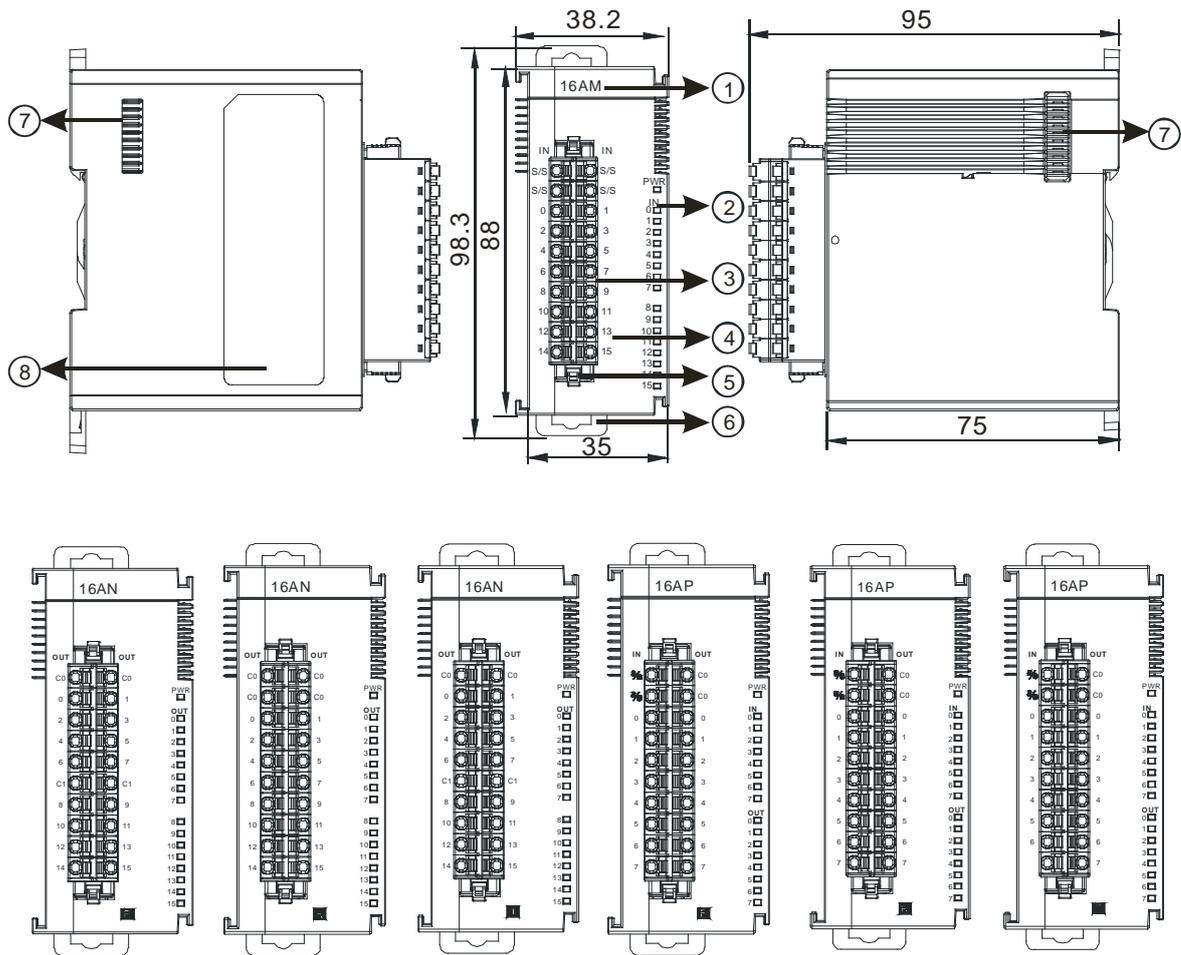

Unit: mm

2.4.9 Wiring AS16AP11R-A

Input form	Direct current (sinking or sourcing)
Input voltage/current	24 VDC, 4.2 mA
Output form	Relay-R
Output voltage/current	10 to 240 VAC, 5 to 24 VDC, 2 A/output, 8 A/COM

2

